

# 1X-F2-99

## Conventional Fire Panel - 2 Zone - English UK

### Overview

1X fire control panels offer state of the art architecture in configurations that deliver an uncomplicated solution for small to mid-sized conventional applications. They feature an attractive contemporary design that fits with any decor. The gently curved door front offers a distinctive flair. Operator controls are inset in a striking black lexan.

With support for multiple lines of conventional detectors and accessories, these quick-to-configure systems offer versatility that benefits building owners and installation/maintenance companies alike.

### The Panel

The 1X-F2 is a conventional fire alarm control panel. It is supplied in local language with 2 zones that support up to 32 devices per zone, as well as up to 2 supervised relay outputs dedicated to sounder control. In addition 2 conventional relay outputs dedicated to common fire and fault conditions, as well as two user configurable inputs for monitoring and control are available.

### Options

The panels support 2 types of auxiliary relay boards, one with 4 standard relays, and one with 4 supervised relays. With these boards the panel outputs may be expanded with up to 8 additional outputs.

### Approvals & Compliance

The product line carries the following accreditations:

- EN54:2, EN54:4 and CE approved
- CPD certified
- NEN2535, NBNS21-100 and BS5839-1 compliant
- WEEE compliant
- RoHS compliant

Type class conditions: 3K5 of IEC 60721-3-3



### Details

- Modern, elegant design
- Easy removable parts for quick and clean installation
- Default regional setup modes
- Normal, head-out & intrinsically safe zone support
- Supervised alarm notification outputs
- EN54 compliant potential free fire & fault relays
- Class change, day/night & remote reset facilities
- Auxiliary 24VDC supply output with reset support
- Default support for special functions such as: - EN54 compliant user access levels - mixed zones - full front panel diagnostics - one-man walk test - CleanMe™
- Auxiliary standard & supervised relay output boards
- Networkable up to 64 zones

# 1X-F2-99

## Conventional Fire Panel - 2 Zone - English UK

### Technical specifications

#### Electrical

Power supply type	VAC
Operating voltage	110 VAC @ 50 Hz or 230 VAC @ 50 Hz (+10% -15%)
Current consumption	2 A @ 110/240 VAC 50 mA (quiescent, no devices) (panel supply) 130 mA (alarm, no devices) (panel supply)

#### Loop

Maximum Loop Capacity 2

#### Zone

Maximum Zone Capacity up to	2
Operating voltage	22 VDC (18-24 VDC)
Cable rating	40 ohm (max cable resistance), 500 nF (max cable capacitance)
Quantity of devices per zone	32 max.

#### Input

Input quantity 2

#### Output

Auxilliary power	24 VDC (21 to 28 VDC)
Supervisory voltage	-15 to +28 VDC

#### Standby battery

Capacity 2 x 12V - 7.2 Ah (SLA)

#### Physical

Physical dimensions	320 x 435 x 134 mm (W x H x D)
Net weight	2.8 kg (without battery)
Shipping weight	4.5 kg
Colour	Grey (RAL 7035)
Mounting type	Surface Mount
Cable entries	Ø 20 mm - 14 / 2 / 12 (top / bottom / rear)

#### Environmental

Operating temperature	-5 to +50°C
Storage temperature	-20 to +70°C
Relative humidity	10 to 95% noncondensing
Environment	Indoor
IP rating	IP30

#### Standards & regulation

Certification	EN54-13, EN54-2, EN54-4
Standards	EN54-2 EN54-4 EN54-13
Environmental	CPD WEEE RoHS

#### Input Supply

	110 VAC/60 Hz or 240 VAC/50 Hz
Cable specification	3 x 1.5 mm <sup>2</sup> (live, neutral, earth)

#### Panel Supply

2A @ 24 VDC

#### Zones

Load (max) 65 mA

#### Inputs

Cable resistance (max) 100 ohm

#### Supervised Outputs

2

Load (max) 250 mA


#### Non Supervised Outputs

2

Load 2 A @ 30 VDC

#### Auxilliary Supply Output

Load (max) 250 mA @ 25°C / 195 mA @ 40°C

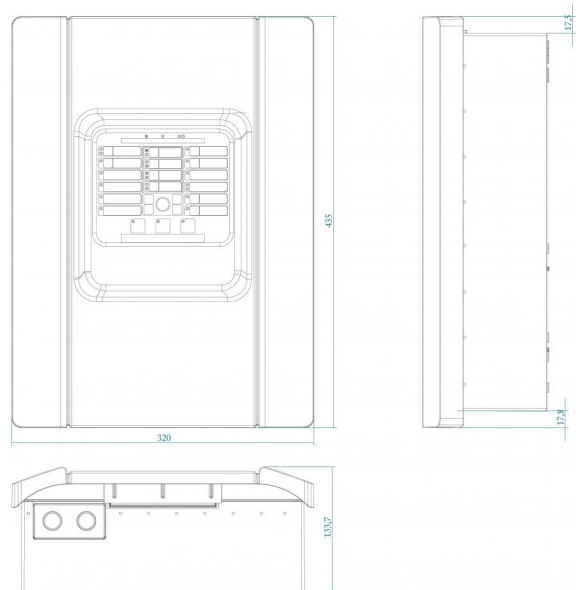

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.

13 August 2019 - 16:21



**United Technologies**

Climate | Controls | Security